


## PROGRAMMABLE PRECISION REFERENCES

The TL431C is three-terminal adjustable shunt regulator with specified thermal stability.

The output voltage may be set to any value between  $V_{REF}$  (Approx. 2.5V) and 36V with two external resistors.

This device has a typical output impedance of  $0.2\Omega$ .


Active output circuitry provides a very sharp turn-on characteristic, making this device excellent replacement for zener diodes in many applications.

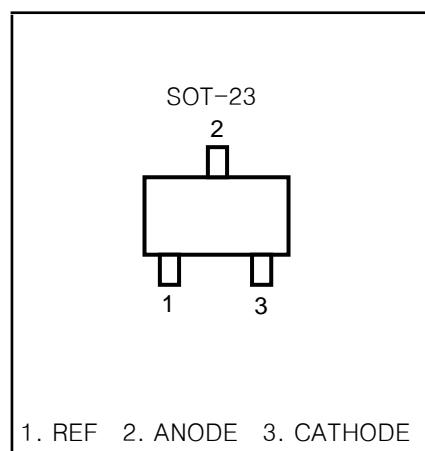

## FEATURES

- Equivalent Full Range Temperature Coefficient 50PPM/ $^{\circ}\text{C}$
- Temperature Compensated For Operation Over Full Rate Operating Temperature Range
- Adjustable Output Voltage
- Fast Turn-on Response
- Sink Current Capability 1mA to 100mA
- Low ( $0.2\Omega$  Typ.) Dynamic Output Impedance
- Low Output Noise

## FUNCTION BLOCK DIAGRAM

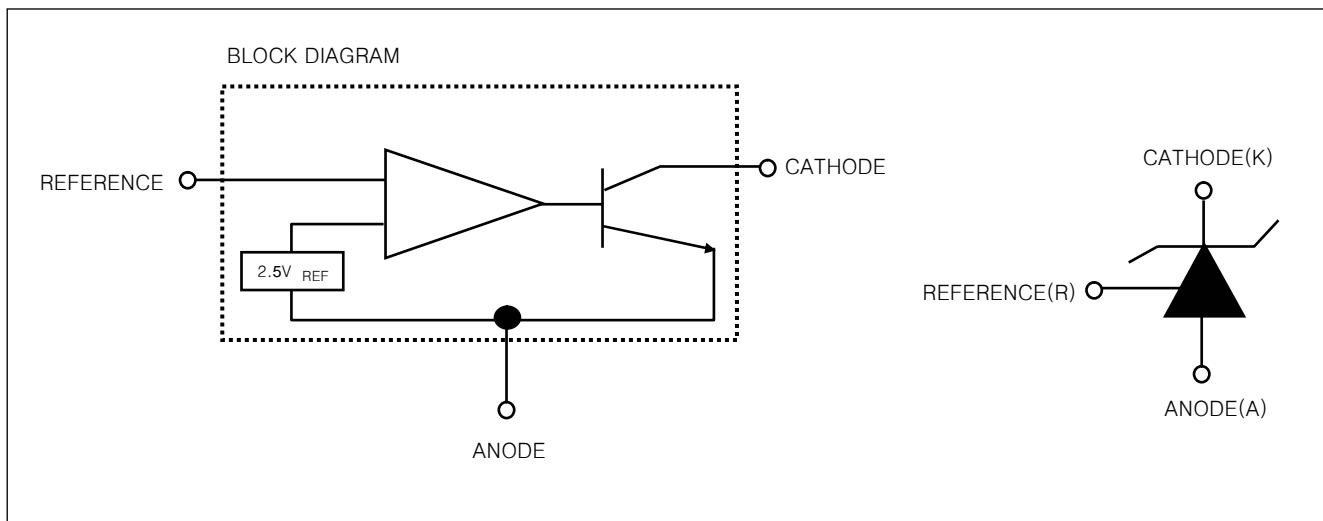

## ABSOLUTE MAXIMUM RATINGS

(Full Operating Ambient Temperature Range Applies Unless Otherwise Noted)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Cathode Voltage	$V_{KA}$	37	V
Continuous Cathode Current Range	$I_{KA}$	-100~+150	mA
Reference Input Current Range	$I_{REF}$	0.05~10	mA
Junction Temperature	$T_J$	150	°C
Operating Temperature	$T_{OPR}$	-20 ~ 85	°C
Storage Temperature	$T_{STG}$	-65 ~ 150	°C
Total Power Dissipation	$P_D$	700	mW

TL431C -0.3% ELECTRICAL CHARACTERISTIC ( $T_A=25^\circ\text{C}$ , unless otherwise specified)




CHARACTERISTIC	SYMBOL	CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Reference Input Voltage	$V_{REF}$	1	$V_{KA}=V_{REF}$ , $I_K=10\text{mA}$		2.487V	2.495V	2.502V	
Deviation of Reference Input Voltage Over Full Temperature Range	$\Delta V_{REF}/\Delta T$	1	$V_{KA}=V_{REF}$ , $I_K=10\text{mA}$ $T_A=\text{Full Range}$			3	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathod Voltage	$\Delta V_{REF}/\Delta V_{KA}$	2	$I_K=10\text{mA}$	$\Delta V_{KA}=10\text{V}-V_{REF}$		-1.4	-2.7	mV/V
				$\Delta V_{KA}=36\text{V}-10\text{V}$		-1	-2	
Reference Input Current	$I_{REF}$	2	$I_{KA}=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$			1.8	4	μA
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{REF}/\Delta T$	2	$I_K=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$ $T_A=\text{Full Range}$			0.4	1.2	μA
Minimum Cathode Current for Regulation	$I_{KA\text{MIN}}$	1	$\Delta V_{KA}=V_{REF}$			0.3	1.0	mA
Off-State Cathode Current	$I_{KA\text{OFF}}$	3	$V_{KA}=36\text{V}$ , $V_{REF}=0$			0.2	1	μA
Dynamic Impedance	$Z_{KA}$	1	$V_{KA}=V_{REF}$ , $I_K=1\text{mA} \sim 100\text{mA}$ , $f \leq 1\text{kHz}$			0.2	0.5	Ω

TL431C-0.5% ELECTRICAL CHARACTERISTIC ( $T_A=25^\circ\text{C}$ , unless otherwise specified)

CHARACTERISTIC	SYMBOL	CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Reference Input Voltage	$V_{\text{REF}}$	1	$V_{\text{KA}}=V_{\text{REF}}$ , $I_K=10\text{mA}$		2.482V	2.495V	2.507V	
Deviation of Reference Input Voltage Over Full Temperature Range	$\Delta V_{\text{REF}}/\Delta T$	1	$V_{\text{KA}}=V_{\text{REF}}$ , $I_K=10\text{mA}$ $T_A=\text{Full Range}$			3	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathod Voltage	$\Delta V_{\text{REF}}/\Delta V_{\text{KA}}$	2	$I_K=10\text{mA}$	$\Delta V_{\text{KA}}=10\text{V}-V_{\text{REF}}$		-1.4	-2.7	mV/V
				$\Delta V_{\text{KA}}=36\text{V}-10\text{V}$		-1	-2	
Reference Input Current	$I_{\text{REF}}$	2	$I_{\text{KA}}=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$			1.8	4	μA
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{\text{REF}}/\Delta T$	2	$I_{\text{KA}}=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$ $T_A=\text{Full Range}$			0.4	1.2	μA
Minimum Cathode Current for Regulation	$I_{\text{KA}}\text{MIN}$	1	$\Delta V_{\text{KA}}=V_{\text{REF}}$			0.3	1.0	mA
Off-State Cathode Current	$I_{\text{KA}}\text{OFF}$	3	$V_{\text{KA}}=36\text{V}$ , $V_{\text{REF}}=0$			0.2	1	μA
Dynamic Impedance	$Z_{\text{KA}}$	1	$V_{\text{KA}}=V_{\text{REF}}$ , $I_K=1\text{mA}\sim100\text{mA}$ , $f\leq1\text{kHz}$			0.2	0.5	Ω

TL431C-1% ELECTRICAL CHARACTERISTIC ( $T_A=25^\circ\text{C}$ , unless otherwise specified)

CHARACTERISTIC	SYMBOL	CIR-CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Reference Input Voltage	$V_{\text{REF}}$	1	$V_{\text{KA}}=V_{\text{REF}}$ , $I_K=10\text{mA}$		2.47V	2.495V	2.52V	
Deviation of Reference Input Voltage Over Full Temperature Range	$\Delta V_{\text{REF}}/\Delta T$	1	$V_{\text{KA}}=V_{\text{REF}}$ , $I_K=10\text{mA}$ $T_A=\text{Full Range}$			3	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathod Voltage	$\Delta V_{\text{REF}}/\Delta V_{\text{KA}}$	2	$I_K=10\text{mA}$	$\Delta V_{\text{KA}}=10\text{V}-V_{\text{REF}}$		-1.4	-2.7	mV/V
				$\Delta V_{\text{KA}}=36\text{V}-10\text{V}$		-1	-2	
Reference Input Current	$I_{\text{REF}}$	2	$I_{\text{KA}}=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$			1.8	4	μA
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{\text{REF}}/\Delta T$	2	$I_{\text{KA}}=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$ $T_A=\text{Full Range}$			0.4	1.2	μA
Minimum Cathode Current for Regulation	$I_{\text{KA}}\text{MIN}$	1	$\Delta V_{\text{KA}}=V_{\text{REF}}$			0.3	1.0	mA
Off-State Cathode Current	$I_{\text{KA}}\text{OFF}$	3	$V_{\text{KA}}=36\text{V}$ , $V_{\text{REF}}=0$			0.2	1	μA
Dynamic Impedance	$Z_{\text{KA}}$	1	$V_{\text{KA}}=V_{\text{REF}}$ , $I_K=1\text{mA}\sim100\text{mA}$ , $f\leq1\text{kHz}$			0.2	0.5	Ω

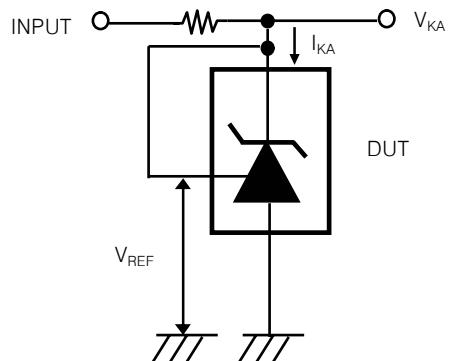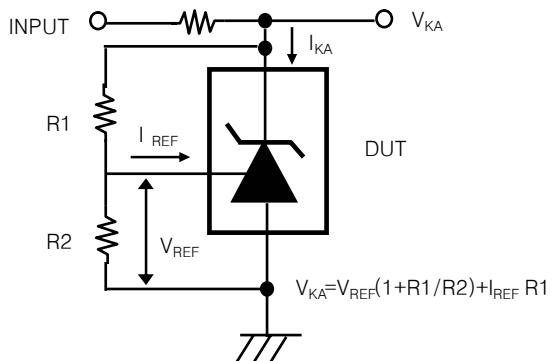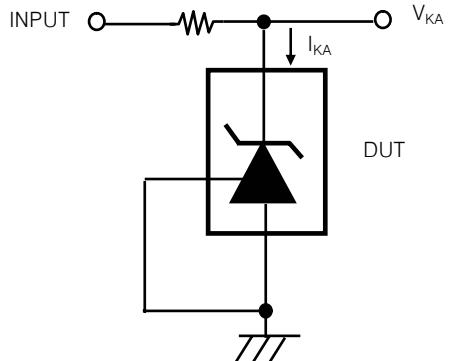Fig. 1 Test Circuit for  $V_{KA}=V_{REF}$ Fig. 2 Test Circuit for  $V_{KA} \geq V_{REF}$ Fig. 3 Test Circuit for  $I_{KA}$  (off)


## TYPICAL PERFORMANCE CHARACTERISTICS



† Data is applicable only within the recommended operating free-air temperature ranges of the various devices.

‡ Data is for devices having the indicated value of V<sub>REF</sub> at I<sub>KA</sub>=10mA,  
T<sub>A</sub>=25°C

Figure 4.

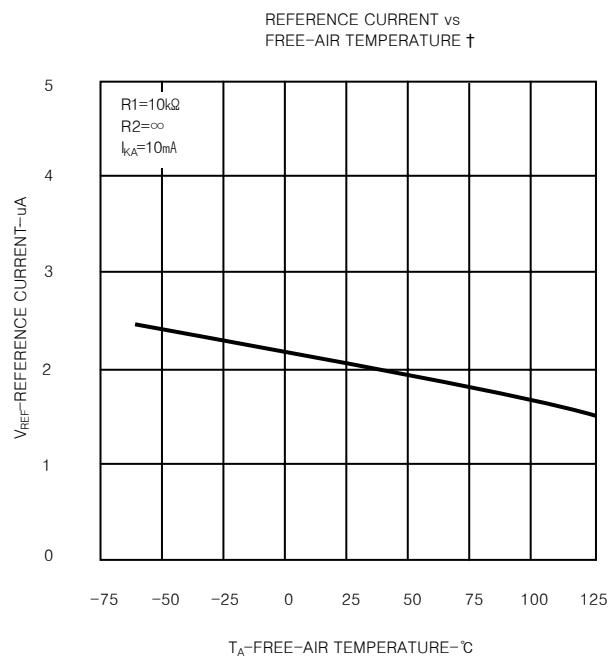

† Data is applicable only within the recommended operating free-air temperature ranges of the various devices.

Figure 5.

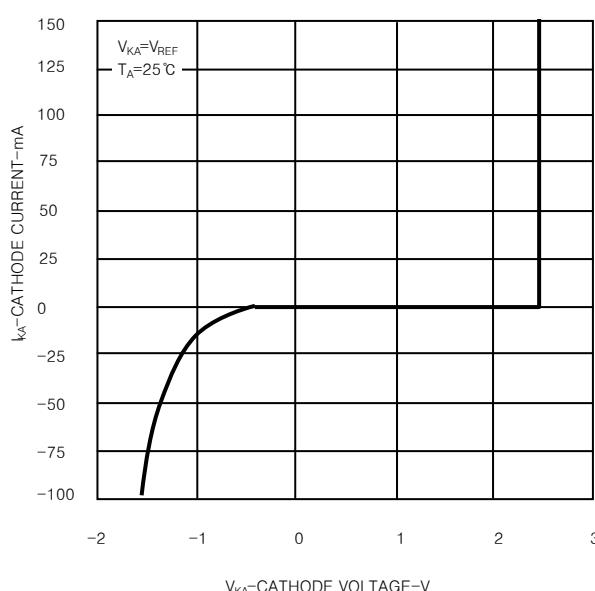


Figure 6.


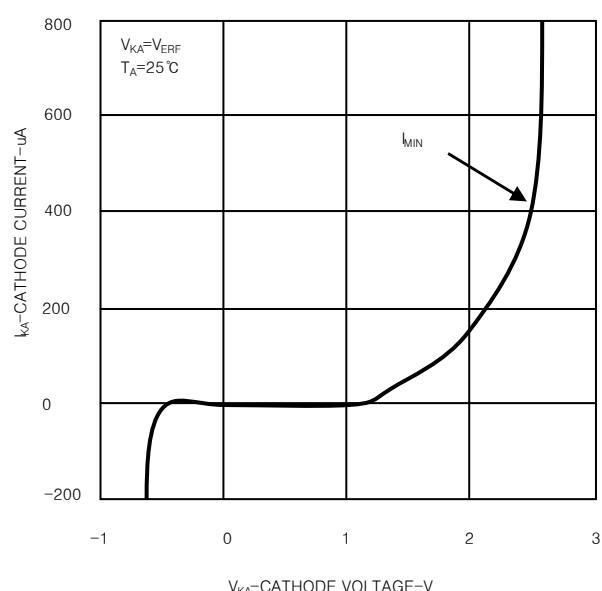



Figure 7.

## TYPICAL PERFORMANCE CHARACTERISTICS

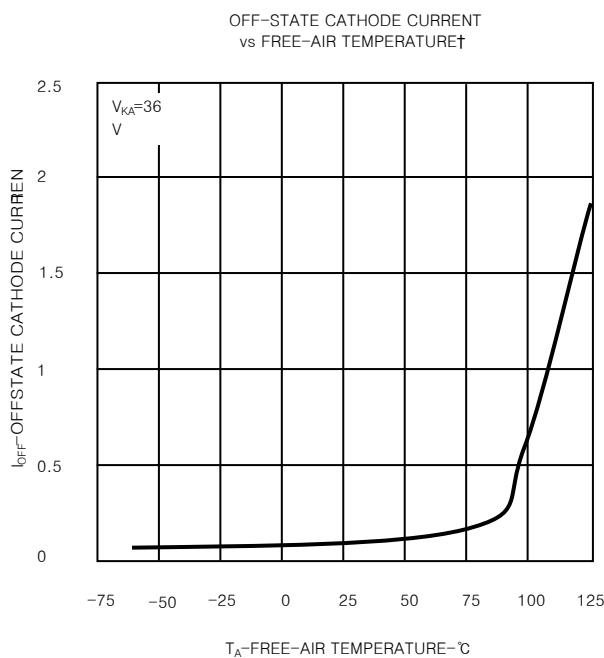

† Data is applicable only within the recommended operating free-air temperature ranges of the various devices.

Figure 8.

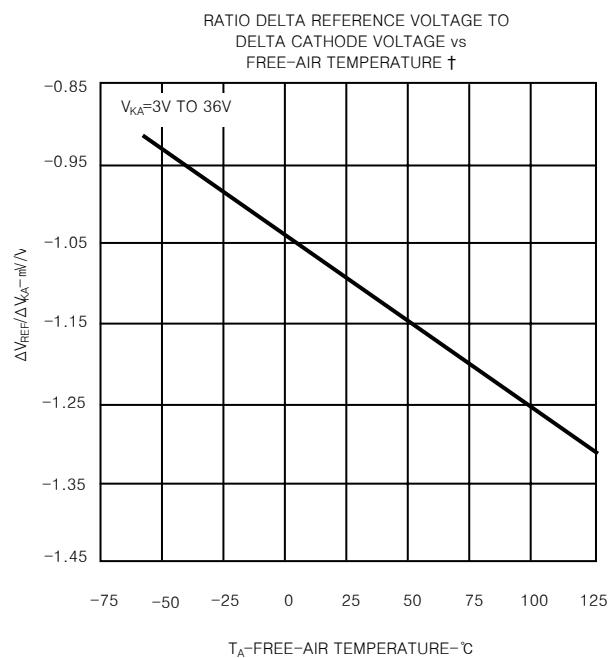

† Data is applicable only within the recommended operating free-air temperature ranges of the various devices.

Figure 9.



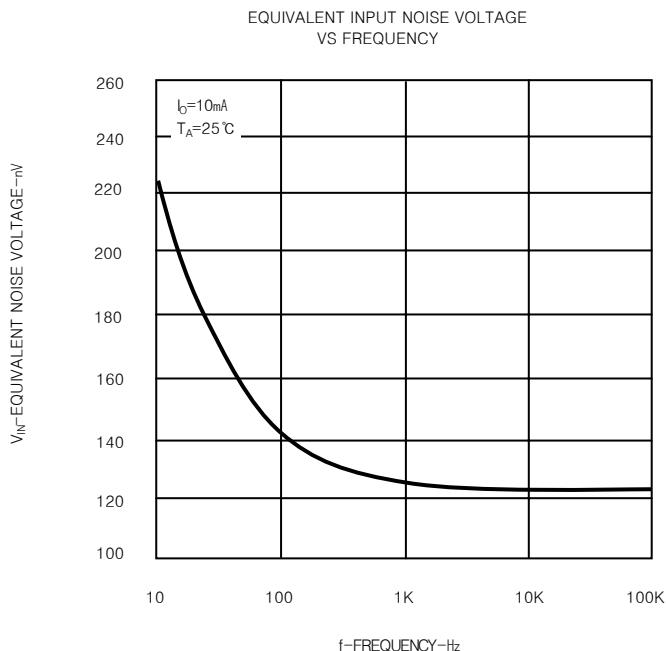




Figure 10.

## TYPICAL PERFORMANCE CHARACTERISTICS

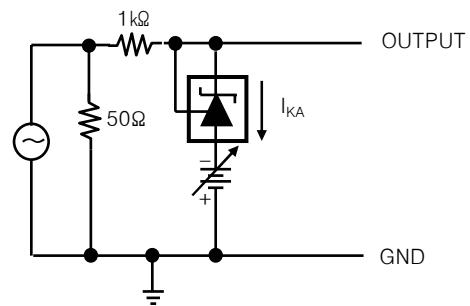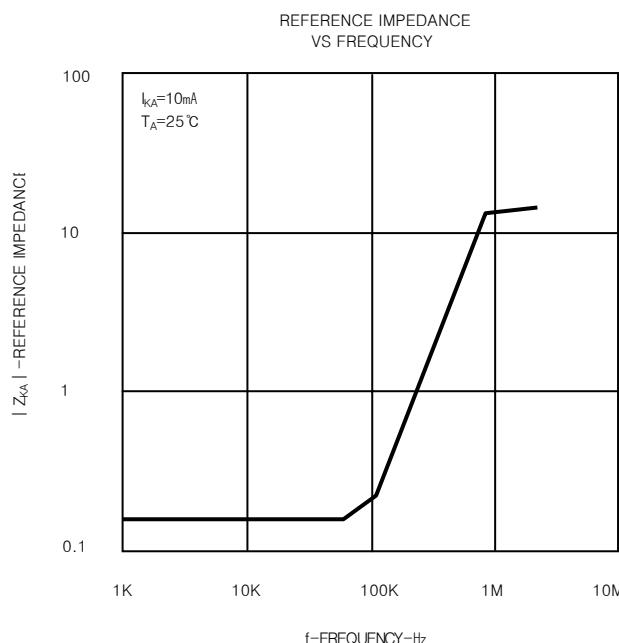

Test Circuit for Reference Impedance


Figure 11.

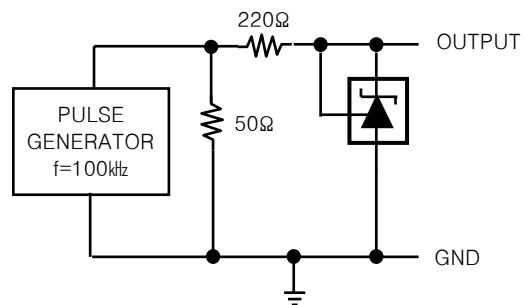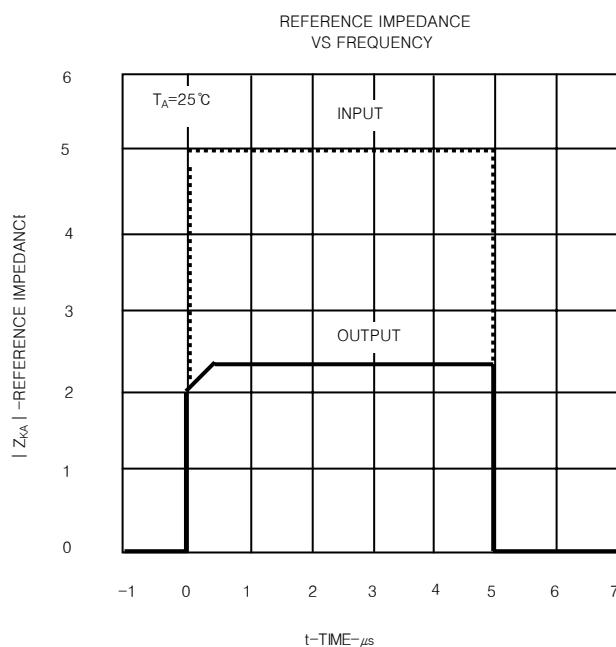

Test Circuit for Pulse Response

Figure 12.

## APPLICATION INFORMATION

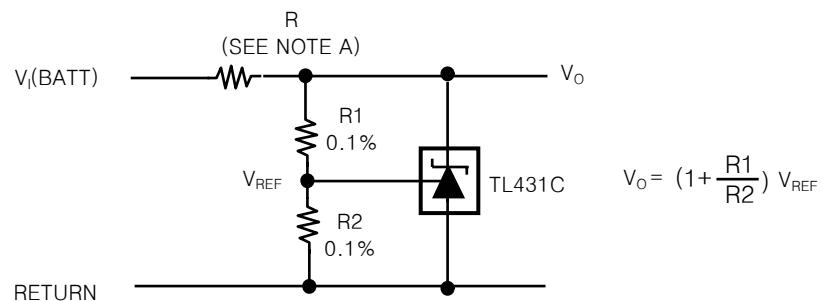

NOTE A : R Should provide cathode current  $\geq 1\text{mA}$  to the TL431C at minimum  $V_i(\text{BATT})$   
Figure 13. Shunt Regulator

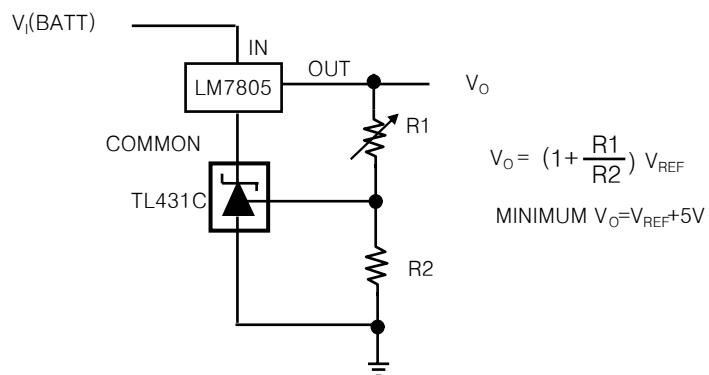


Figure 14. Output Control of a 3-Terminal Fixed Regulator


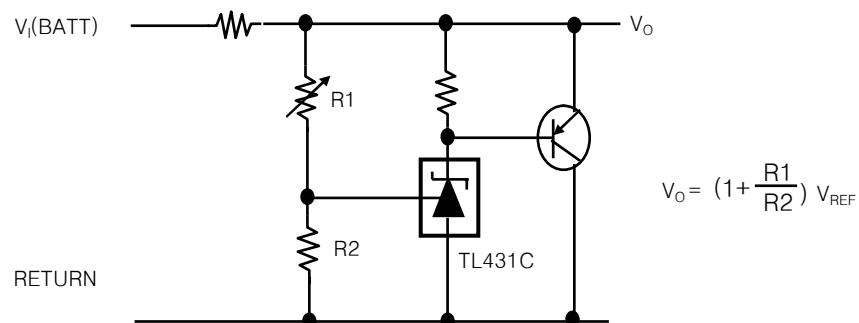


Figure 15. High-Current Shunt Regulator

## SOT-23 Package Outline Dimensions (Units: mm)

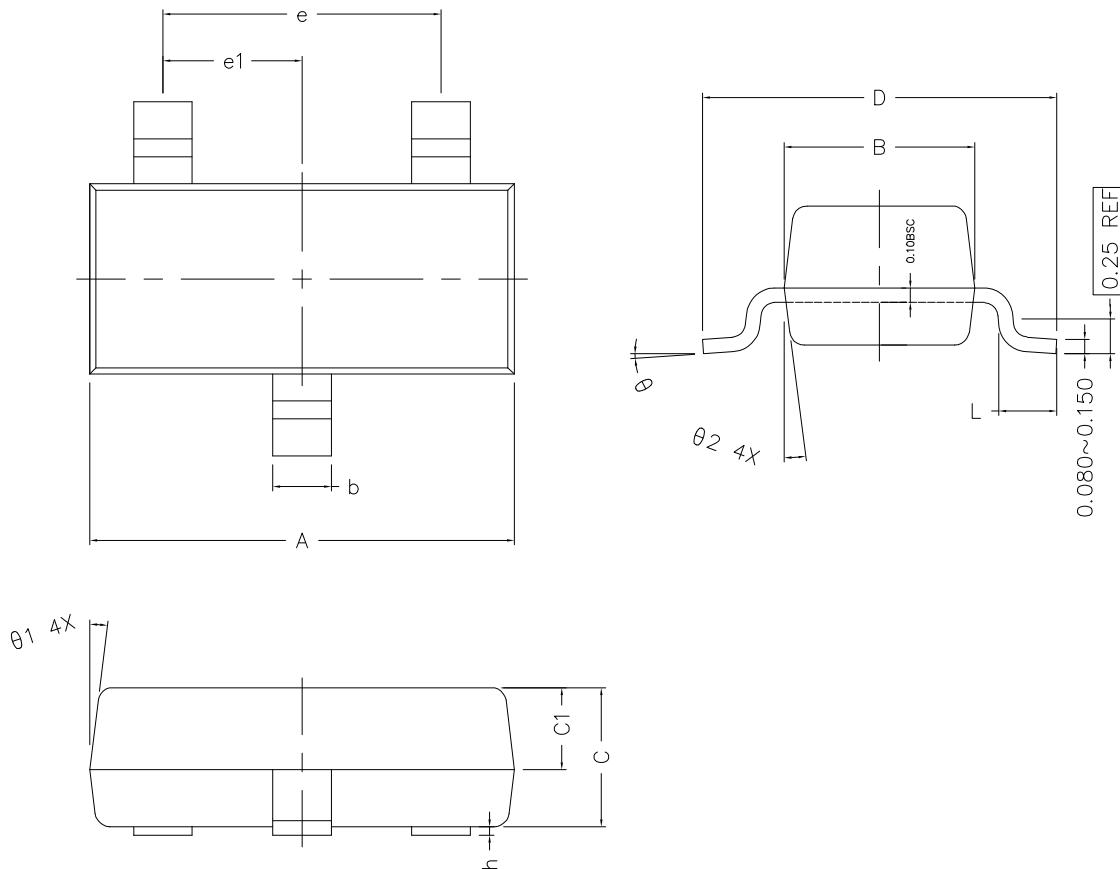

	COMMON DIMENSIONS (UNITS OF MEASURE IS mm)		
	MIN	NORMAL	MAX
A	2.800	2.900	3.000
B	1.200	1.300	1.400
C	0.900	1.000	1.100
C1	0.500	0.550	0.600
D	2.250	2.400	2.550
L	0.300	0.400	0.500
h	0.010	0.050	0.100
b	0.300	0.400	0.500
e	1.90 TYPE		
e1	0.95 TYPE		
θ <sub>1</sub>	7° TYPE		
θ <sub>2</sub>	7° TYPE		
θ	0° ~ 7°		